



Public Works Department

433 N. Virginia Street
Prescott AZ 86301
928-777-1130

ADDENDUM NUMBER ONE
to the
PROJECT SPECIFICATIONS
and
CONTRACT DOCUMENTS
for
FY 2015 Pavement Preservation Project
Project # 2157810-8930-90036

DATE OF ADDENDUM: **May 30, 2014**

BID OPENING: **June 5, 2014 (unchanged)**

TO ALL BIDDERS BIDDING ON THE ABOVE PROJECT:

The following addendum shall be made part of the Contract Documents. All other provisions of the Contract Documents remain unchanged. The Bidder shall acknowledge receipt of this addendum on page 15 of the Proposal by inserting the addendum number and date on the executed page of the Proposal. The contents of this Addendum shall be given full consideration in the preparation of the Bid.

ADDENDUM NOTES:

321.15 PAVEMENT REPAIR TYPE 1, TYPE 2, TYPE 3, TYPE 4, AND TYPE 5

Is supplemented with the following:

Water Vault Removal and Pavement Restoration

The Contractor shall remove the existing water vault on Britni Drive per Exhibit "A".

Payment shall be at the lump sum cost to include all sawcutting, excavation, removal of the existing water vault in one, undamaged unit, backfill excavation with aggregate base course placed in compacted lifts, paved back with 4" thick asphalt concrete pavement in two compacted lifts flush with the adjoining pavement, and all incidental work necessary to complete the work in place. Payment shall include delivering and off-loading the vault at the City Water Operations Facility on Sundog Ranch Road.

No separate payment shall be made for emulsified bituminous tack coat. Such payment shall be considered incidental to the work for which emulsified bituminous tack coat is required.

Pay Item: 321.15f – Water Vault Removal and Pavement Restoration

ADDITIONAL TYPE "B" CAPE SEAL

The Contractor shall construct a Type "B" Cape Seal on Talwatha Drive per Exhibit "B" and the requirements of the plans and specifications.

Bid Item 332.9 – Asphalt Emulsion Slurry Seal Coat is increased to 143,570 SY.

Bid Item 370 – Rubber Chip seal is increased to 161,570 SY.

DELETE:BID SCHEDULE
ADD:REVISED BID SCHEDULE - attached

EXHIBIT "A" - Attached

EXHIBIT "B" - Attached

- END -

City of Prescott, Public Works Department



Henry Hash, Public Works Director

Acknowledgement: (must be signed and turned in with the bid documents)

Company Name

Date

Signature of Company Official

Date

REVISED BID SCHEDULE

FY 2015 Pavement Preservation Project

Item	Description	Quantity	Unit	Unit Cost	Amount
100.4	Public Relations Allowance	1	LS	\$40,000.00	\$40,000.00
104.3	Mobilization	1	LS		
105.8a	Construction Staking	1	LS		
105.8b	Sierry Peaks Drive Engineering Services	1	LS		
109-1	Contract Allowance	1	LS	\$120,000.00	\$120,000.00
205.2	Removal of Unsuitable Subgrade Material and Backfill with ABC	300	CY		
317.3a	Mill Header Cut	1,300	SF		
321.15a	Pavement Repair Type 1 - Pavement Repair	5,600	SF		
321.15b	Pavement Repair Type 2 - Crack Repair	5,600	SF		
321.15c	Pavement Repair Type 3 - Pavement Reconstruction	1,200	SY		
321.15d	Pavement Repair Type 4 - Sierry Peaks Pavement Reconstruction	3,100	SY		
321.15e	Pavement Repair Type 5 - Mill/Overlay	1,400	SY		
321.15f	Water Vault Removal & Pavement Restoration	1	LS		
330.1	Asphalt Chip Seal	31,000	SY		
331.8a	Microsurfacing Dry Aggregate	930	TN		
331.8b	Microsurfacing Asphalt Emulsion	120	TN		
332.9	Asphalt Emulsion Slurry Seal Coat	143,570	SY		
340.1	Concrete Roll Curb Replacement	20	LF		
340.2	Concrete Sidewalk Replacement	500	SF		
340.5	Concrete Valley Gutter Spandrell Replacement	300	SF		
345-1a	Adjust Sewer Manhole Frame and Cover - Type 1	60	EA		
345-1b	Adjust Sewer Manhole Frame and Cover - Type 2	35	EA		
345-1c	Adjust Sewer Cleanout Frame and Cover - Type 1	4	EA		
345-1d	Adjust Sewer Cleanout Frame and Cover - Type 2	15	EA		
345-1e	Adjust Water Valve Box and Cover - Type 1	115	EA		
345-1f	Adjust Water Valve Box and Cover - Type 2	5	EA		
345-1g	Adjust Storm Drain Manhole Frame and Cover	17	EA		
370	Rubber Chip Seal	161,570	SY		
401.7a	Traffic Control Plan	1	LS		
401.7b	Flaggers	1,340	HR		
401.7c	Certified Police Personnel Allowance	1	LS	\$20,000.00	\$20,000.00
401.7d	Barricades and Storage	1	LS		
401.7e	Lighted Message Board	130	Day		
401.7f	Incidental Traffic Control Related Items	1	LS		
402.1a	Obliterate Existing Thermoplastic Striping	1,400	LF		
402.1b	Obliterate Existing Thermoplastic Left Turn Arrow	8	EA		
402.1c	Obliterate Existing Thermoplastic Right Turn Arrow	7	EA		
402.1d	Obliterate Existing Thermoplastic Thru Arrow	2	EA		
402.1e	Obliterate Existing Thermoplastic Right Turn/Thru Arrow	2	EA		
402.2a	Thermoplastic Striping - White	3,900	LF		
402.2b	Thermoplastic Left Turn Arrow	9	EA		

REVISED BID SCHEDULE

FY 2015 Pavement Preservation Project

Item	Description	Quantity	Unit	Unit Cost	Amount
402.2c	Thermoplastic Right Turn Arrow	10	EA		
402.2d	Thermoplastic Thru Arrow	3	EA		
402.2e	Thermoplastic Right Turn/Thru Arrow	2	EA		
402.3a	Temporary Striping - Yellow Paint	21,000	LF		
402.3b	Temporary Striping - White Paint	21,000	LF		
402.3c	Temporary Left Turn Arrow - White Paint	9	EA		
402.3d	Temporary Right Turn Arrow - White Paint	10	EA		
402.3e	Temporary Thru Arrow - White Paint	3	EA		
402.3f	Temporary Right Turn/Thru Arrow - White Paint	2	EA		
402.4a	Permanent Striping - Yellow Paint	21,000	LF		
402.4b	Permanent Striping -White Paint	18,000	LF		
405.3.2	Adjust Survey Handhole Frame and Cover	26	EA		
	Total Bid Amount				

TOTAL BASE BID

Dollars

(Written Words)

Signature of Company Official

Title

Company Name

Phone Number


Address

Fax Number

City/State

Zip Code

WILLOW LAKE RD

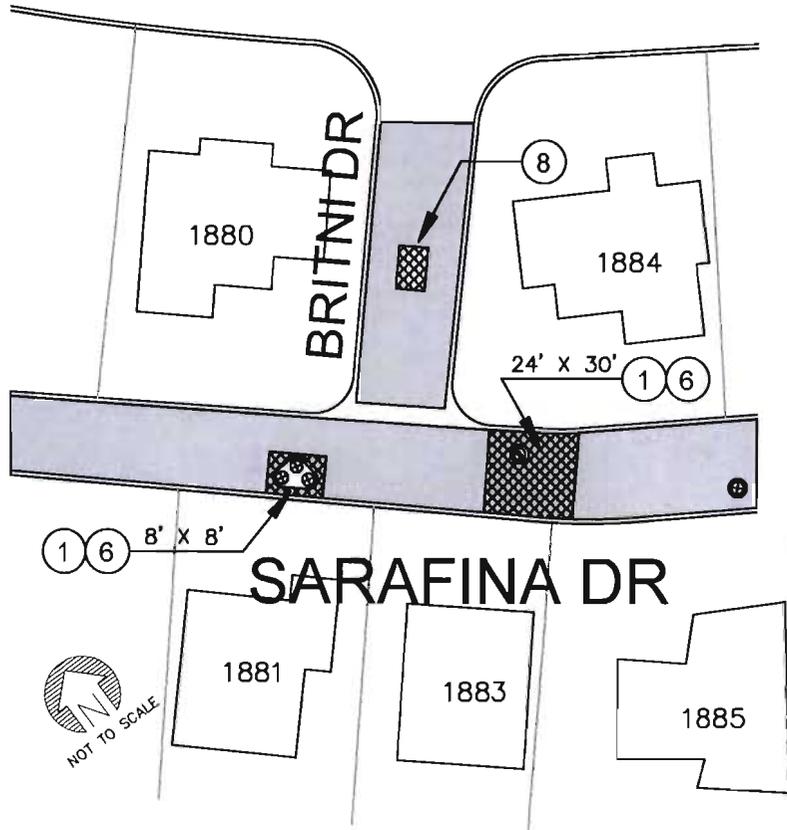

PAVEMENT REPAIRS CONSTRUCTION NOTE: ADDED BY ADDENDUM

8

EXISTING SADDLE TYPE WATER VAULT TO BE REMOVED. SAWCUT 18" AROUND EXISTING WATER VAULT AND EXCAVATE TO DEPTH OF VAULT. REMOVE THE VAULT INTACT. DELIVER AND OFFLOAD UNDAMAGED VAULT AT THE COP WATER OPERATIONS FACILITY ON SUNDOG RANCH ROAD.

RESTORE EXCAVATION WITH COMPACTED AGGREGATE BASE MATERIAL PLACED IN LIFTS. PAVE BACK PER PAVEMENT REPAIR TYPE 1.

EXISTING VAULT IS APPROXIMATELY 9' X 6' BY 6' DEEP. PROTECT IN PLACE EXISTING WATER MAIN AT BOTTOM OF VAULT.



EXHIBIT "A" FY 2015 PAVEMENT PRESERVATION PROJECT

CITY OF PRESCOTT - PUBLIC WORKS DEPARTMENT

SEAL COAT TALWATHA DR



TYPE "B" MULTI-LAYER
SEAL COAT (TYPICAL)



NOT TO SCALE

RUTH ST

TALWATHA DR



EXHIBIT "B" FY 2015 PAVEMENT PRESERVATION PROJECT

CITY OF PRESCOTT - PUBLIC WORKS DEPARTMENT